

THREE PHASE	Mechanical Features						Electric Features					
	Working moment (°)		FC		Weight		Power		Current			Cable
	Kgcm	Kg	Kg	Lb	Kw	A max	Temp. Class					
50Hz								60Hz	50Hz	50Hz	50 Hz	
TYPE	50Hz	60Hz	50Hz	60Hz	50Hz	50Hz	50 Hz	60 Hz	50 Hz	60 Hz	(°C)	Glande
MICRO 20/3	0.39	0.39	22	32	1.5	3.3	0.03	0.04	0.10	0.12	100	M16
MICRO 40/3	0.78	0.55	40	40	1.7	3.7	0.07	0.07	0.25	0.25	100	M16

(*) = Working moment = 2 x static moment

SINGLE PHASE	Mechanical Features						Electric Features					
	Working moment (*)		FC		Weight		Power		Current			Cable
	Kgcm		Kg		Kg	Lb	Kw		A max		Temp. Class	
TYPE	50Hz	60Hz	50Hz	60Hz	50Hz	50Hz	50 Hz	60 Hz	50 Hz	60 Hz	Dust	Glande
									400V	460V	(°C)	
MICRO 4/3 M	0.12	0.12	5	8	1.4	3.1	0.02	0.02	0.3	0.6	100	M16
MICRO 5/3 M	0.12	0.12	5	8	1.4	3.1	0.02	0.02	0.3	0.6	100	M16
MICRO 20/3 M	0.39	0.39	22	32	1.5	3.3	0.03	0.04	0.10	0.23	100	M16
MICRO 40/3 M	0.78	0.55	40	40	1.7	3.7	0.07	0.07	0.40	0.80	100	M16


(*) = Working moment = 2 x static moment

TYPE	Dimensional Features												
	FG.	C	M	A	B	Ø G	Holes	D	E	F	H	I	N
		(mm)	(mm)	(mm)	(mm)	(mm)	n°	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
		50Hz	50Hz										
MICRO 20/3	F	142	35	25-40	92	6.5	4	110	73	9	33	60	72
MICRO 40/3	F	162	45	25-40	92	6.5	4	110	73	9	33	60	72

NOTE: Dimensions with coarse degree of accuracy related to UNI 22768/1

TYPE	Dimensional Features												
	FG.	C	M	A	B	Ø G	Holes	D	E	F	H	I	N
		(mm)	(mm)	(mm)	(mm)	(mm)	n°	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
		50Hz	50Hz										
MICRO 4/3 M	F	142	35	25-40	92	6.5	4	110	73	9	33	60	72
MICRO 5/3 M	F	142	35	25-41	75	5.5	4	90	73	9	33	60	72
MICRO 20/3 M	F	142	35	25-42	92	6.5	4	110	73	9	33	60	72
MICRO 40/3 M	F	162	45	25-43	92	6.5	4	110	73	9	33	60	72

NOTE: Dimensions with coarse degree of accuracy related to UNI 22768/1

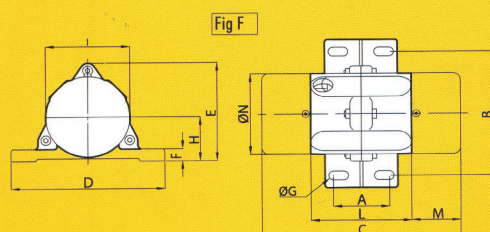

 IISD T100°C resp T135°C – IP66
 TUV NORD Statement Conformity Number TUV 05 ATEX 2768X
 - Equipment and protective system intended for use in potentially explosive atmospheres (Zone 22) - Directive 94/9/EC
 - Compliance with Essential Health and Safety Requirements
 EN 61241-10

 Declaration of conformity "type A" according to:
 - 73/23/EEC - 98/37/EEC - EN 60034-1

 Class II Div.2 Group F/G - T6 - NEMA 4 conform to UL 1836 and CSA C22.2 N025
 Intertek ETL - SEMCO